




Specification	
Input Voltage	220 TO 250 AC
Input Frequency (Hz)	50-60
Drivers	INCLUDED
CRI	≥80
Beam Angle	120°
Life (H)	50000
Operating Temperature (°c)	-25 to 35
IP Rating	IP40
Warranty	5 Years

Physical Data	
Shape	LINEAR
Colour	WHITE
Finish	Polycarbonate

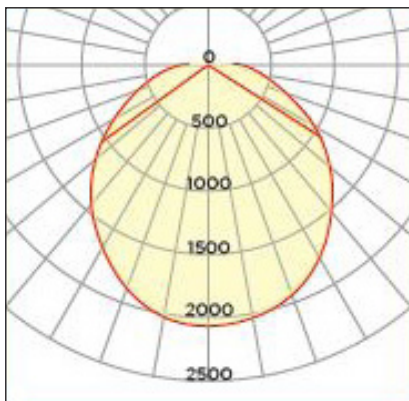

### KEY FEATURES

- Upto 120 lm/w
- Upto 70% of energy savings
- LM80 Epistar Chipset·Surface/Suspension
- Polycarbonate Diffuser
- Dimmable and Emergency Optional
- Adjustable Wattages
- Osram Driver
- UgR19 Available

Ordering Information						
Part Number	Power (W)	Lumen	Depth (mm)	Length (mm)	Width (mm)	Colour Temp
AL-COL2-24-1200	24	2880	87	1236	213	4000
AL-COL2-36-1500	36	4320	87	1537	213	4000
AL-COL2-45-1800	45	5400	87	1801	213	4000

**IP40**

**WARRANTY: 5 YEARS**

