




Specification	
Input Voltage	220 TO 250 AC
Input Frequency (Hz)	50-60
Drivers	OSRAM
CRI	≥80
Life (H)	50000
Operating Temperature (°c)	-25 to 35
IP Rating	IP40
Warranty	5 Years

Physical Data	
Shape	LINEAR
Colour	WHITE
Finish	Polycarbonate

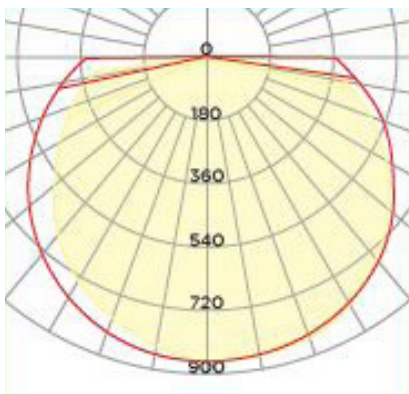

KEY FEATURES

- Upto 130l/w
- Upto 70% of energy savings
- LM80 Epistar Chipset
- 600mm Retro fitting slots
- Polycarbonate Diffuser
- Dimmable and Emergency Optional
- Adjustable Wattages
- Osram Driver
- UGR19

Ordering Information

Part Number	Power (W)	Lumen	Depth (mm)	Length (mm)	Width (mm)	Colour Temp
AL-TP8-600	8	1040	93	600	84	4000
AL-TP15-600	15	1950	93	600	84	4000
AL-TP15-1200	15	1950	93	1227	84	4000
AL-TP24-1200	24	3120	93	1227	84	4000
AL-TP20-1500	20	2600	93	1527	84	4000
AL-TP32-1500	32	4160	93	1527	84	4000
AL-TP25-1800	25	3250	93	1791	84	4000
AL-TP40-1800	40	5200	93	1791	84	4000

IP40

WARRANTY: 5 YEARS

