



AURALED

LANDSCAPES





The Home of LED Lighting Solutions



Since 2011, **AuraLED** has established itself as a market leader in LED Lighting solutions. We are continually developing our products to meet the ever-changing demands of our clients and adopting new technologies to offer new and improved solutions.

Our new range of Linear in-ground fixtures brings a wide range of design options for landscape lighting.

Whether it's a warm white or RGB, the **AuraLED** range allows you to create some outstanding aesthetics. The fittings were designed and built to last the test of time and everyday rigours, whether in drive-over applications or wet environments.

AuraLED's dedicated team of professionals is on hand to advise on the best possible solution for your project.


Should you require installation advice, our **AuraTEC** team of expert technicians can ensure you get the best possible outcome.

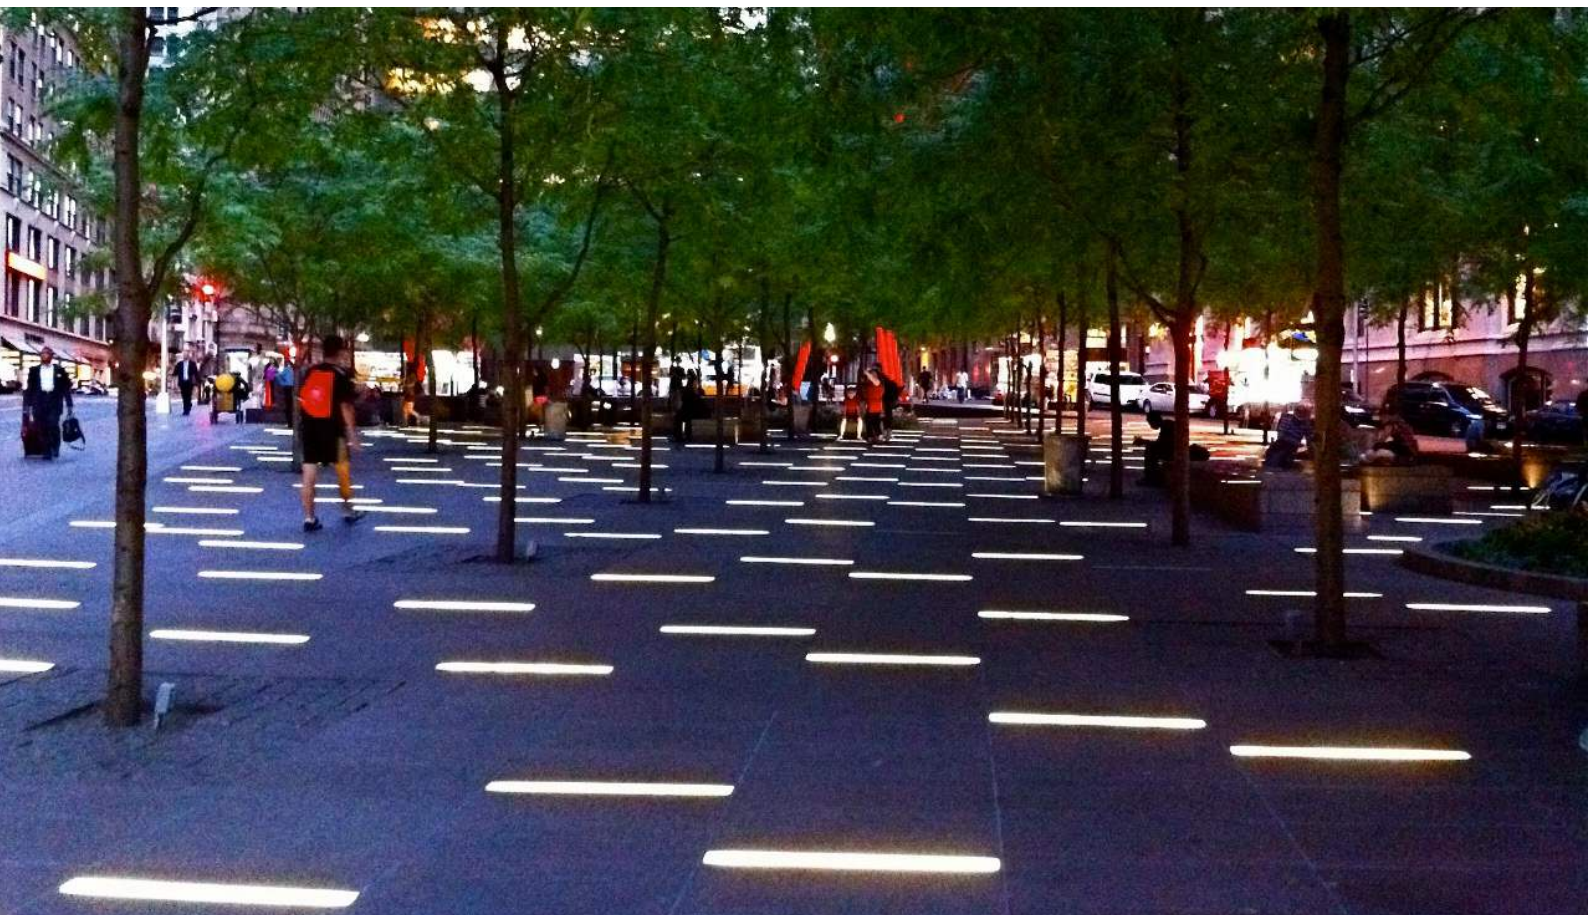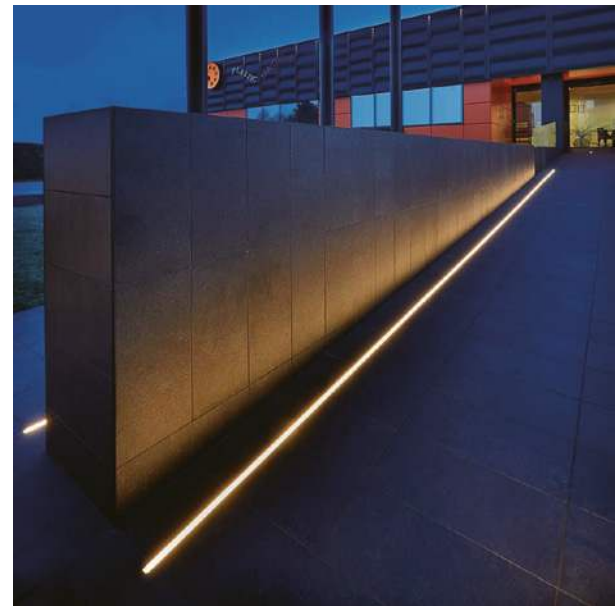



Landscapes Contents

Walkover LED Linear Lighting	2 - 3
In-ground Linear Lighting	4 - 7
In-ground Lighting	8 - 12
Antiglare Louvre	13
Swimming Pool Lighting	14
Sauna & Spa Lighting	15
AuraTEC Installation	16

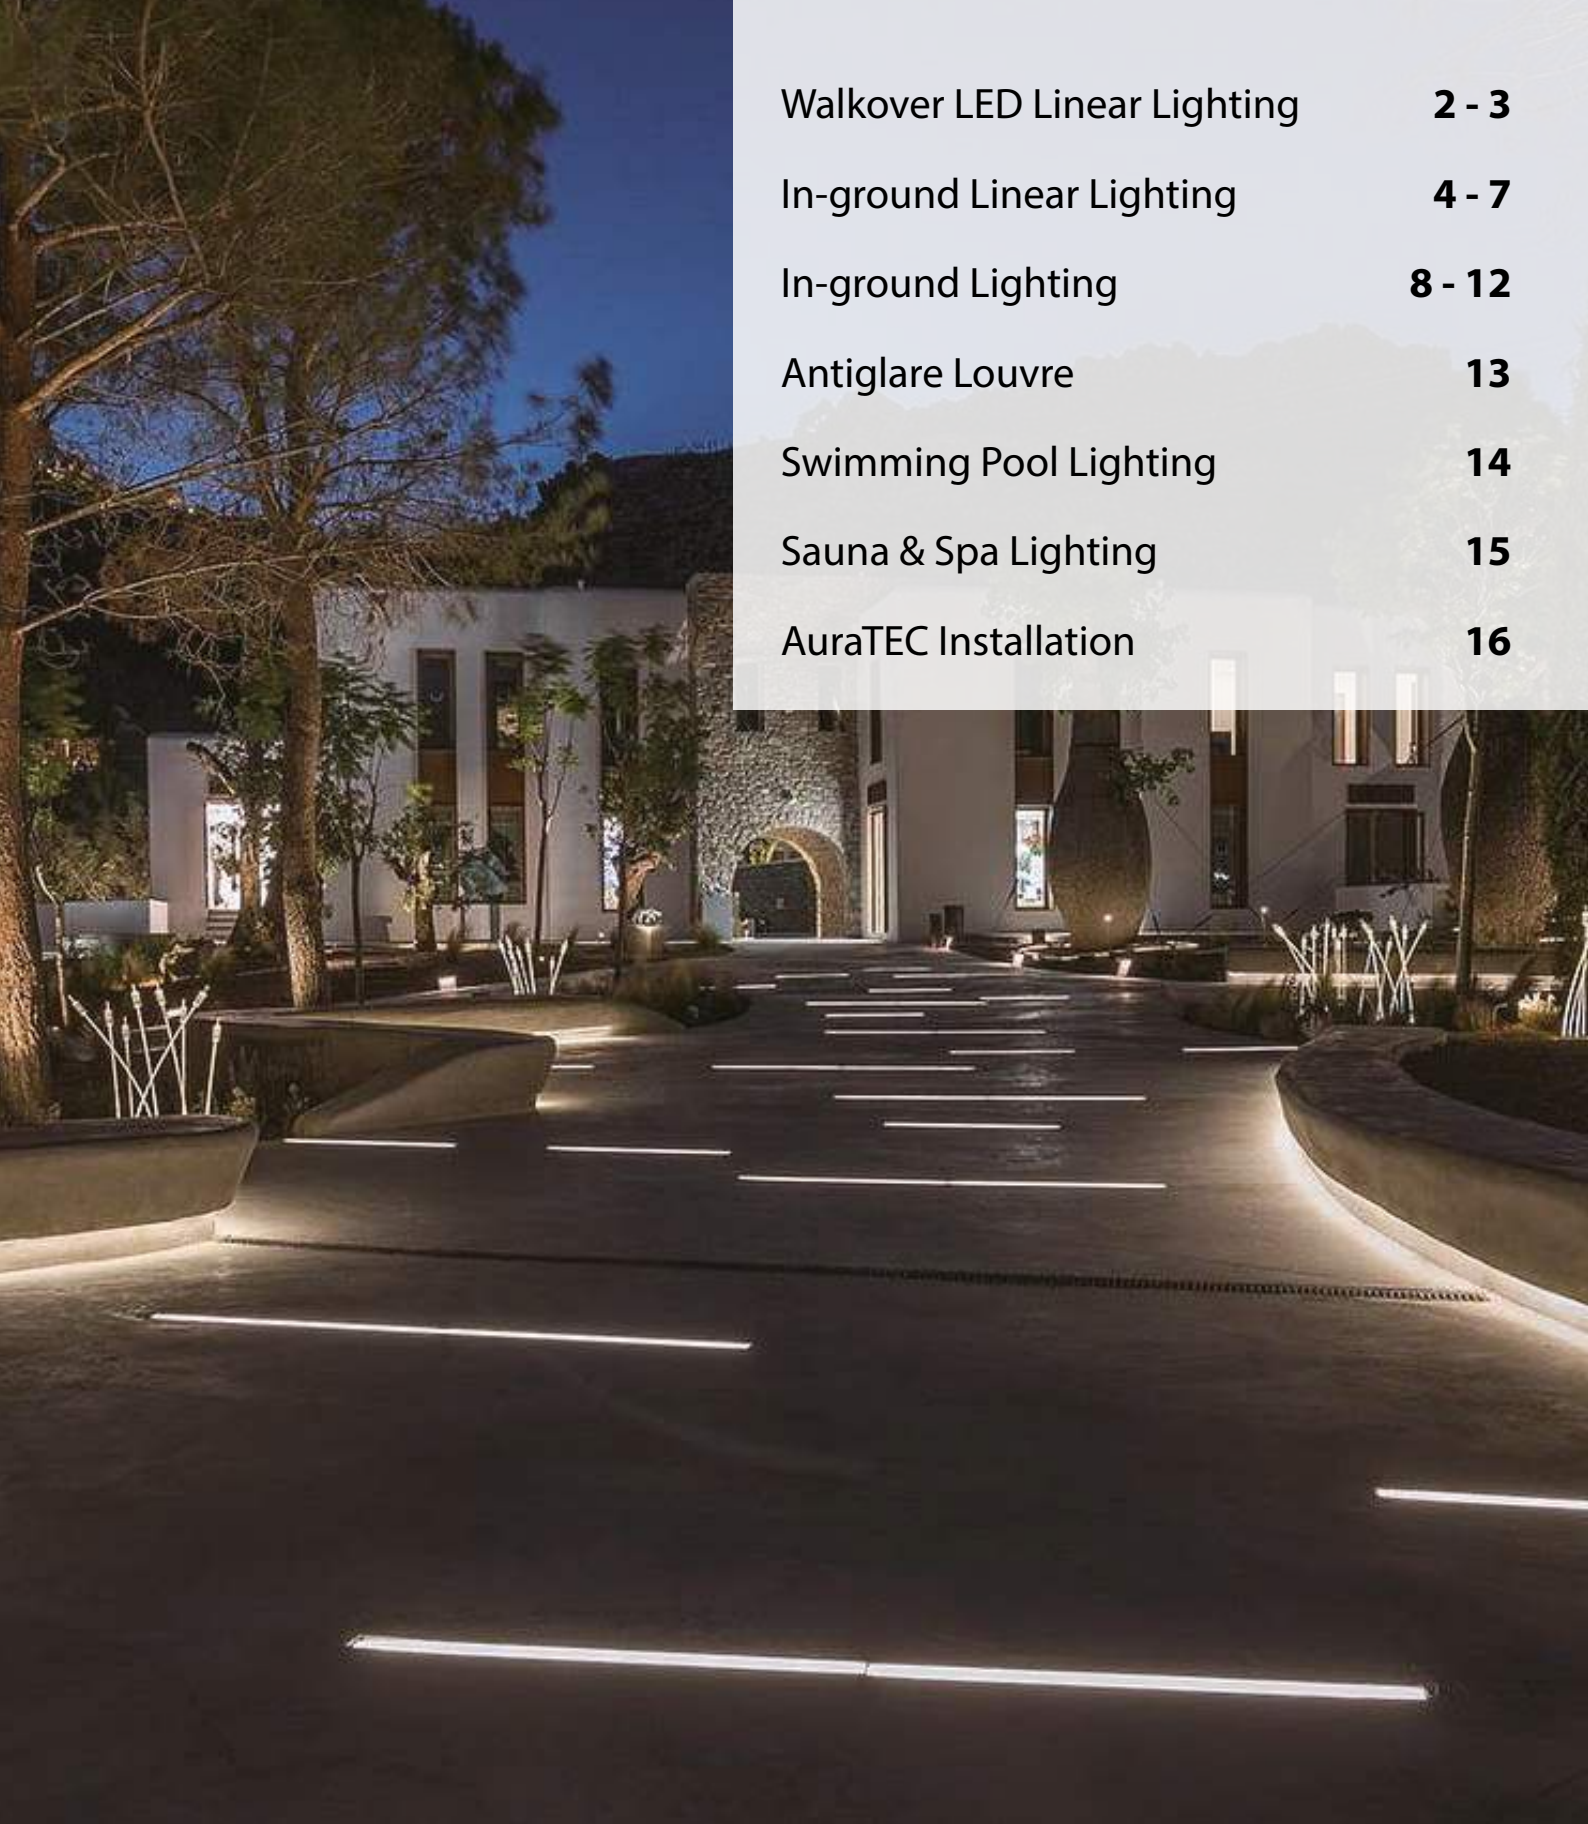

AL-WP02AL1


Walkover LED Linear Light

AL-WP02AL1 is a walkover LED Linear light with an IP67 rating suitable for indoor and outdoor lighting. Can be used in swimming pools.

Features:

- Colour Temperature 2400K - 6500K
- Length 1000mm, 2000mm, 3000mm
- Bespoke Lengths

Ordering Information			
Code	Power	Kelvin	Length
AL-WP02AL1- 1000	10W	2400K - 6500K	1000mm
AL-WP02AL1- 2000	20W	2400K - 6500K	2000mm
AL-WP02AL1- 3000	30W	2400K - 6500K	3000mm



Specification	
Voltage	24V DC
Power	10W/meter
Lumens	700lm
Beam Angle	110°
Kelvin	2400K - 6500K
IP Rating	IP67
IK Rating	IK10

AL-WP02AL4


Walkover LED Linear Light

AL-WP02AL4 is a walkover LED Linear light with an IP67 rating suitable for indoor and outdoor lighting. Can be used in swimming pools.

Features:

- Colour Temperature 2400K - 6500K
- Length 1000mm, 2000mm, 3000mm
- Bespoke Lengths

Ordering Information			
Code	Power	Kelvin	Length
AL-WP02AL4- 1000	10W	2400K - 6500K	1000mm
AL-WP02AL4- 2000	20W	2400K - 6500K	2000mm
AL-WP02AL4- 3000	30W	2400K - 6500K	3000mm



Specification	
Voltage	24V DC
Power	10W/meter
Lumens	700lm
Beam Angle	110°
Kelvin	2400K - 6500K
IP Rating	IP67
IK Rating	IK10

AL-WP03AL3


Walkover LED Linear Light

AL-WP03AL3 is a walkover LED Linear light with an IP67 rating suitable for indoor and outdoor lighting. Can be used in swimming pools.

Features:

- Colour Temperature 2400K -6500K
- Length 1000mm, 2000mm, 3000mm
- Bespoke Lengths

Ordering Information			
Code	Power	Kelvin	Length
AL-WP03AL3- 1000	15W	2400K - 6500K	1000mm
AL-WP03AL3- 2000	30W	2400K - 6500K	2000mm
AL-WP03AL3- 3000	45W	2400K - 6500K	3000mm



Specification	
Voltage	24V DC
Power	15W/meter
Lumens	950lm
Beam Angle	110°
Kelvin	2400K - 6500K
IP Rating	IP67
IK Rating	IK10

AL-WP03AL2


Walkover LED Linear Light

AL-WP03AL2 is a walkover LED Linear light with an IP67 rating suitable for indoor and outdoor lighting. Can be used in swimming pools.


Features:

- Colour Temperature 2400K - 6500K
- Length 1000mm, 2000mm, 3000mm
- Bespoke Lengths

Ordering Information			
Code	Power	Kelvin	Length
AL-WP03AL2- 1000	15W	2400K - 6500K	1000mm
AL-WP03AL2- 2000	30W	2400K - 6500K	2000mm
AL-WP03AL2- 3000	45W	2400K - 6500K	3000mm



Specification	
Voltage	24V DC
Power	10W/meter
Lumens	950lm
Beam Angle	110°
Kelvin	2400K - 6500K
IP Rating	IP67
IK Rating	IK10

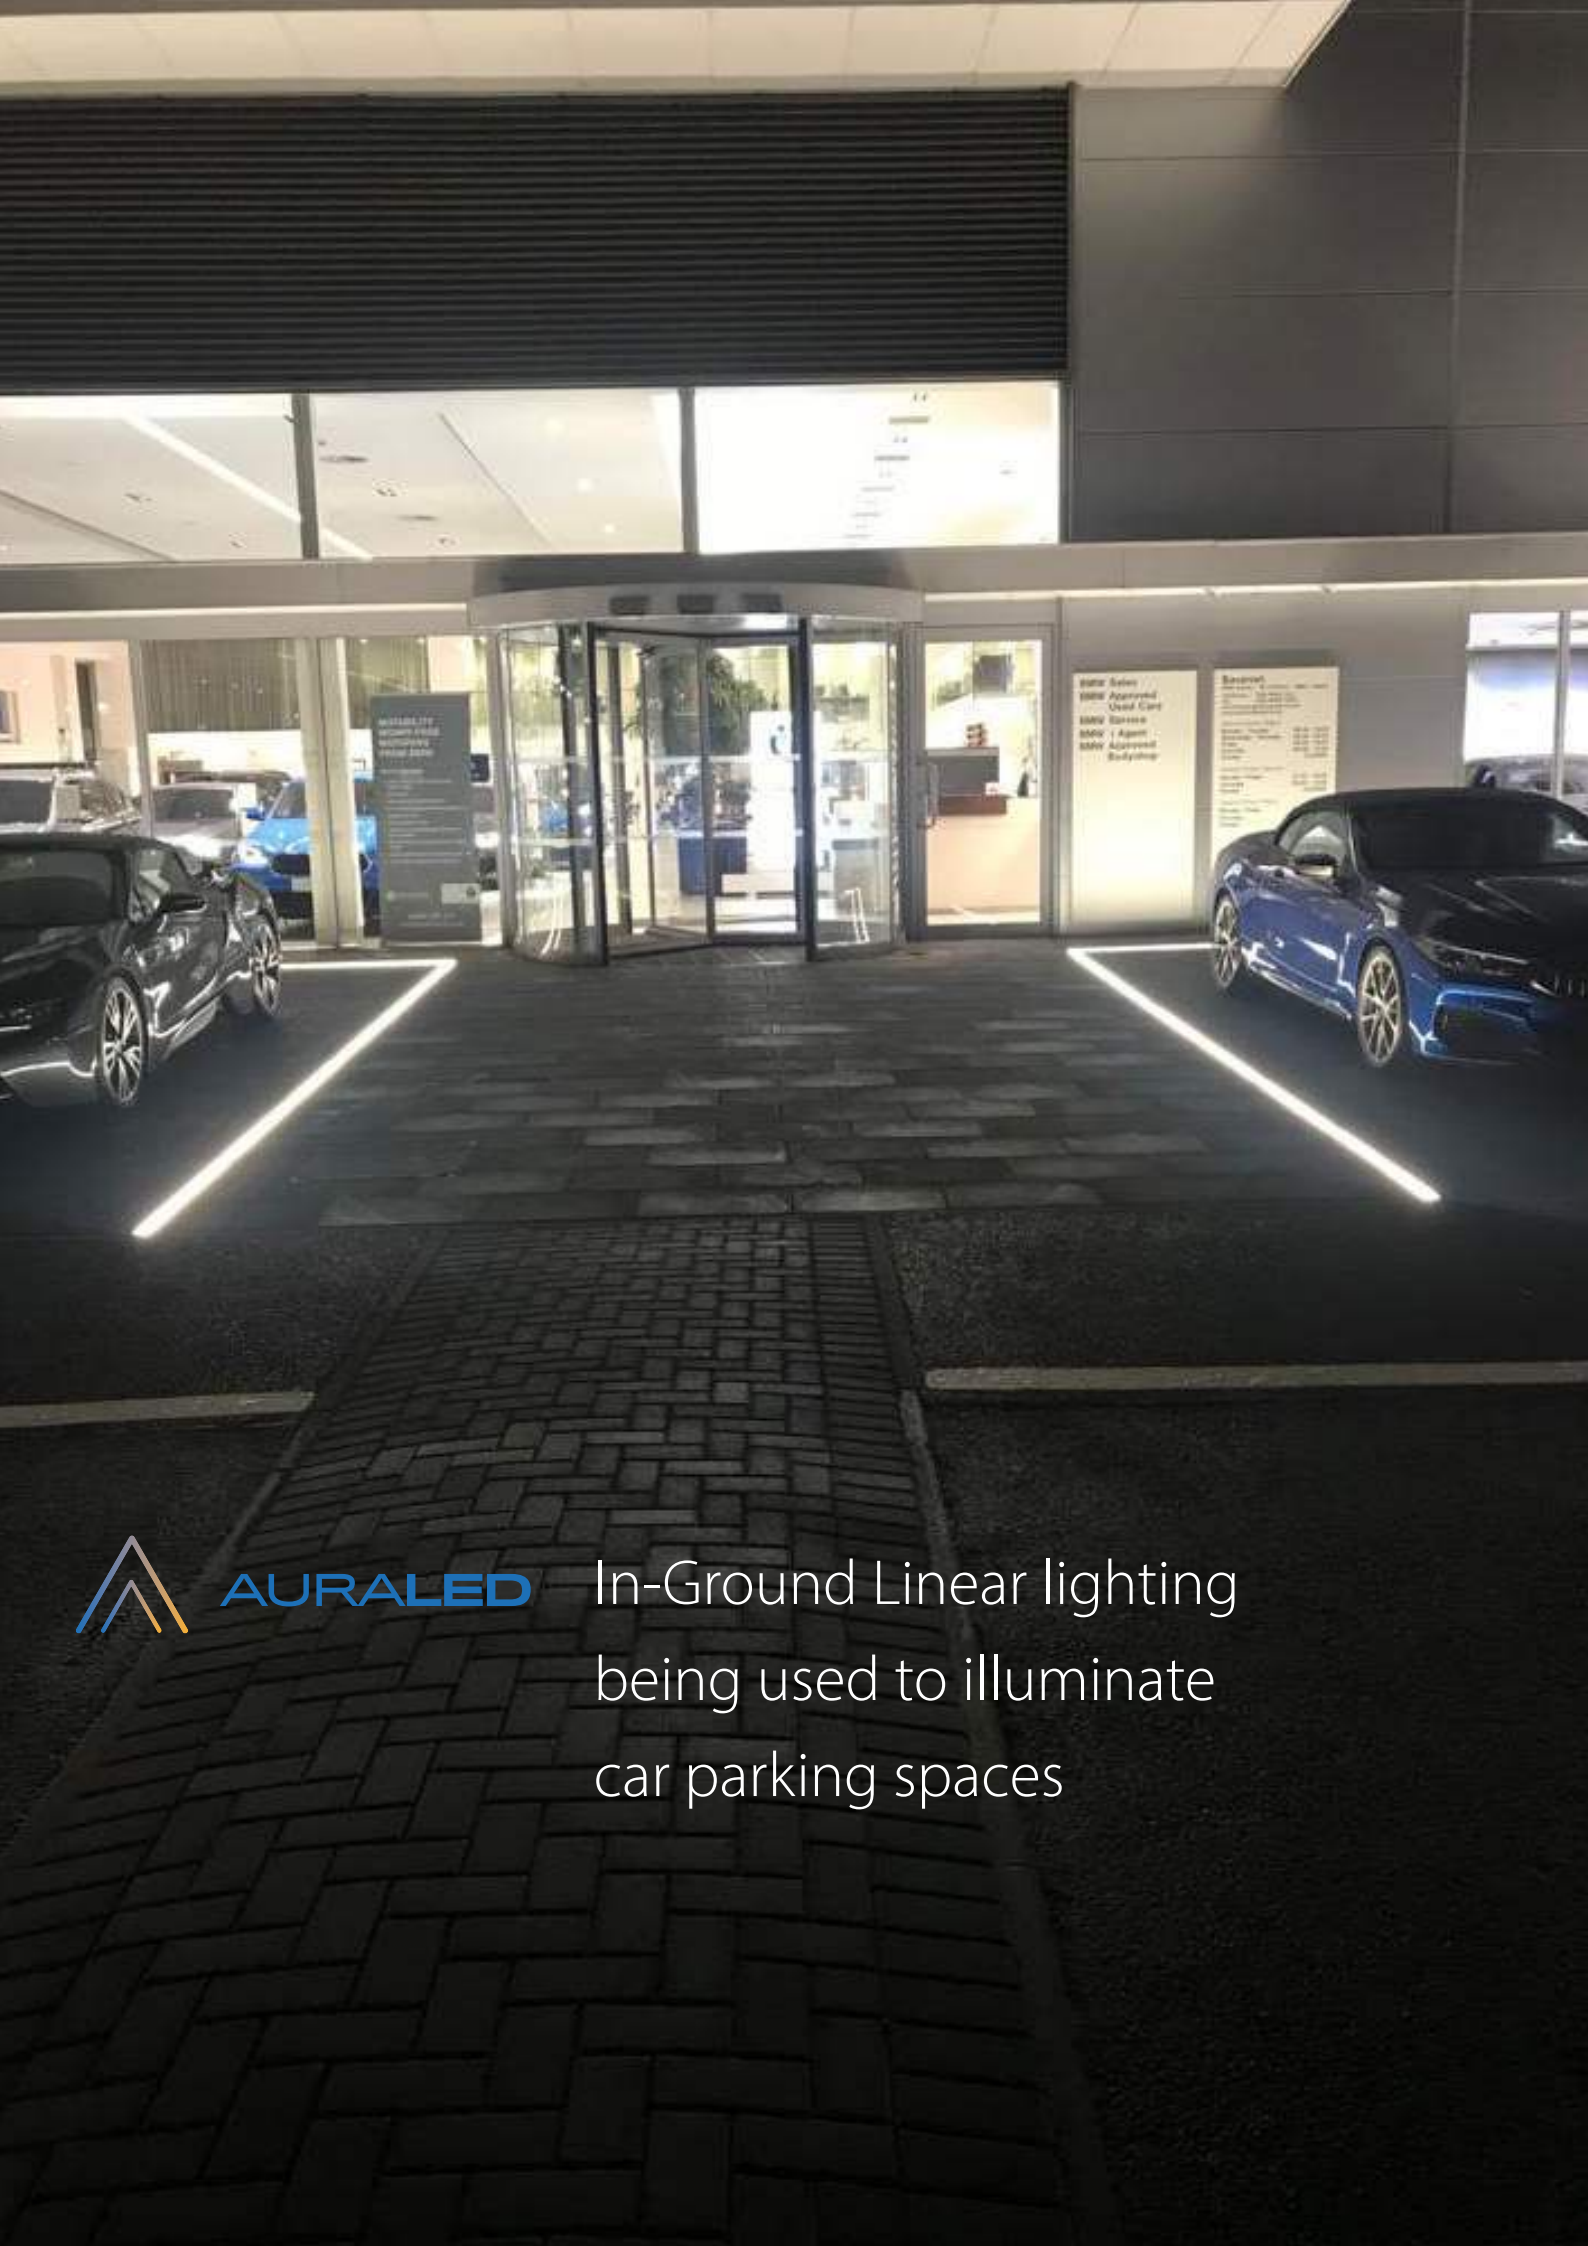

AURALED

In-Ground Linear lighting
being used to illuminate
car parking spaces

AL-DIG In-Ground Linear

The AL-DIG is an IP67-rated premium quality wall washer in-ground luminaire. Extruded aluminium housing, optimized heat dissipation structure and the PCB layout design ensure a long lifetime and better stability. Together with the high-density tempered glass and stainless steel cover plate, the AL-DIG is suitable for any exterior challenges.

Features:


- Colour and Colour Temperature RGB or RGBW 4-in-1 with W in 3000K, 4000K+
- Length 505mm, 930mm (including mounting plate)
- Optics 20°, 30°, 50°, 20°x50°




Ordering Information			
Code	Power	Kelvin	Length
AL-DIG-RGB-505	14W	RGB	505mm
AL-DIG-RGBW-505	14W	RGBW	505mm
AL-DIG-3K-505	14W	3000K	505mm
AL-DIG-4K-505	14W	4000K	505mm
AL-DIG-RGB-930	28W	RGB	930mm
AL-DIG-RGBW-930	28W	RGBW	930mm
AL-DIG-3K-930	28W	3000K	930mm
AL-DIG-4K-930	28W	4000K	930mm

Specification	
Voltage	100-277VAC 50/60Hz
Power	14W (505mm) 28W (930mm)
Lumens	1120LM @930mm 15° (All Channels on) Static white - 85 lm/watt, @3000K, 15° RGBW - 45 lm/watt 15° (All Channels on)
Kelvin	RGB or RGBW 4-in-1 with W in 3000K, 4000K
Optics	20°, 30°, 50°, 20°x50°
IP	Rating IP67



Deco Top View

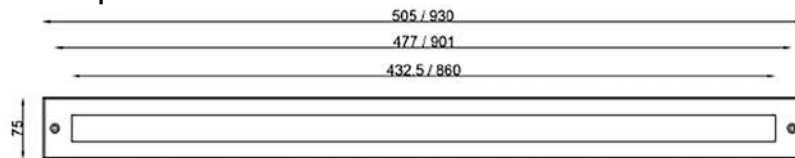

Deco In-ground Housing

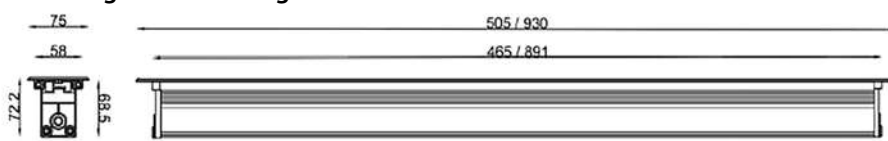

Deco In-ground Housing with Mounting Sleeve

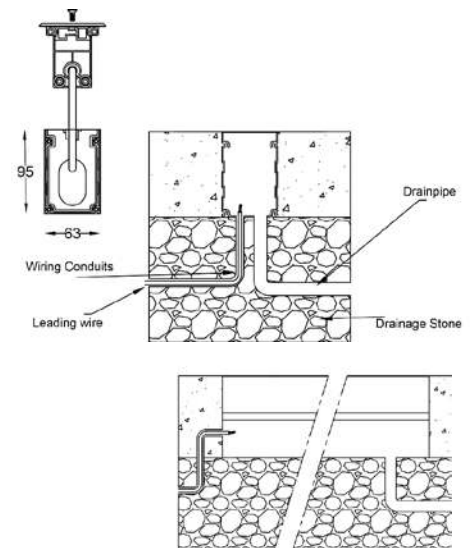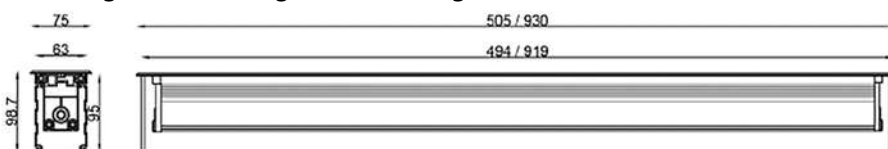

Remark:

- Failure to provide adequate draining installation will void warrant
- Make sure that wire is connected with seal connections
- Please use stainless steel screws for the mounting trim
- Make sure topper side is at the same level with ground service

AL-DMU

Mini In-Ground Linear

AL-DMU Mini is an in-ground linear burial upright that is optically engineered. The housing is designed to achieve best-in-class glare-free performance. A minimum of 100mm set back distance is required from the fixture's edge to the wall's surface to gain the most powerful wall washing or glazing effect.


Features:

- Colour Temperature 3000K, 4000K
- Length 306mm, 606mm, 1206mm
- Optics 12°, 30°, 10°x50°, 40°x60°




Ordering Information			
Code	Power	Kelvin	Length
AL-DMU-3K-306	6W	3000K	306mm
AL-DMU-4K-306	6W	4000K	306mm
AL-DMU-3K-606	12W	3000K	606mm
AL-DMU-4K-606	12W	4000K	606mm
AL-DMU-3K-1206	24W	3000K	1206mm
AL-DMU-4K-1206	24W	4000K	1206mm

Specification	
Voltage	DC 24V
Power	6W (306mm) 12W (606mm) 24W (1206mm)
Lumens	360lm per foot @3000K CCT, CRI80, 12° narrow beam Static white 65lm/watt @3000K, 12°
Kelvin	3000K, 4000K
Optics	12°, 30°, 10°x50°, 40°x60°
IP Rating	IP66

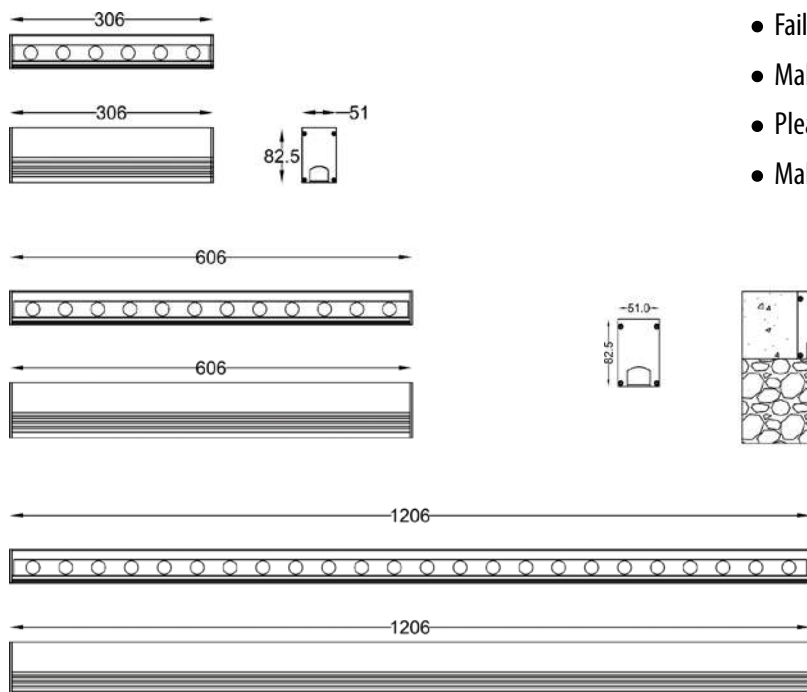

Remark:

- Failure to provide adequate draining installation will void warrant
- Make sure that wire is connected with seal connections
- Please use stainless steel screws for the mounting trim
- Make sure topper side is at the same level with ground service

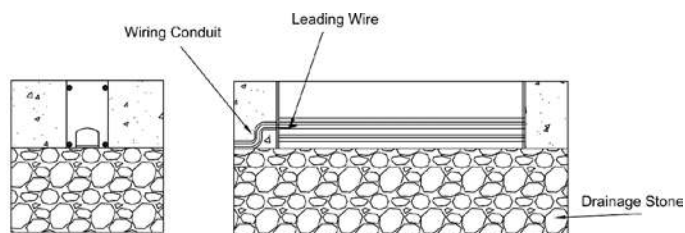

AL-SLINE In-Ground Linear Pixel

AL-SLINE Linear Pixel is an in-ground fixture that offers a unique and adaptable solution for various lighting requirements in landscape and public areas. The 316 Stainless Steel mounting sleeve provides better corrosion resistance. With a power of 12W per meter, this product is an energy-efficient solution for a robust in-ground luminaire. Each AL-SLINE has a thin end cap, which allows seamless end-to-end pixel spacing.

Features:


- Colour Temperature 3000K, 4000K RGBW3K & RGBW4K
- Length 590mm, 1000mm




Ordering Information			
Code	Power	Kelvin	Length
AL-SLINE-3K-590	7W	3000K	590mm
AL-SLINE-4K-590	7W	4000K	590mm
AL-SLINE-RGBW3K-590	7W	RGBW3K	590mm
AL-SLINE-RGBW4K-590	7W	RGBW4K	590mm
AL-SLINE-3K-1000	12W	3000K	1000mm
AL-SLINE-4K-1000	12W	4000K	1000mm
AL-SLINE-RGBW3K-1000	12W	RGBW3K	1000mm
AL-SLINE-RGBW4K-1000	12W	RGBW4K	1000mm

Specification	
Voltage	DC 24V
Power	7W (590mm) 12W (1000mm)
Lumens	14lm/watt @ All channels on
Kelvin	3000K, 4000K, RGBW3K, RGBW4K
IP Rating	IP67
IK Rating	IK10

590mm

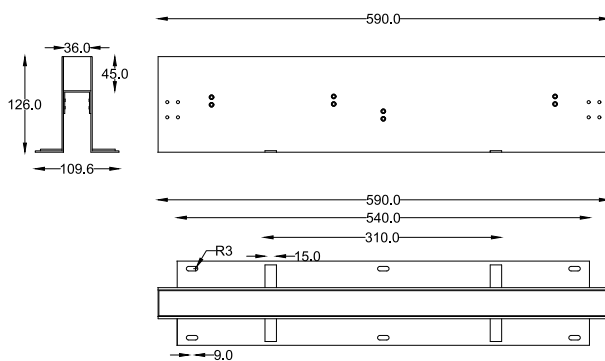


1000mm

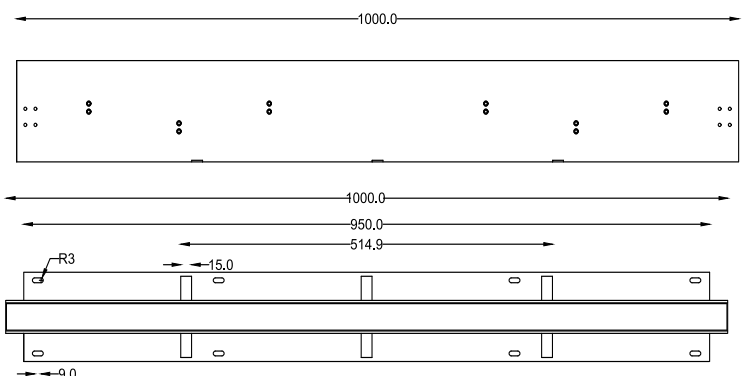

Remark:

- Failure to provide adequate draining installation will void warrant
- Make sure that wire is connected with seal connections
- Please use stainless steel screws for the mounting trim
- Make sure topper side is at the same level with ground service

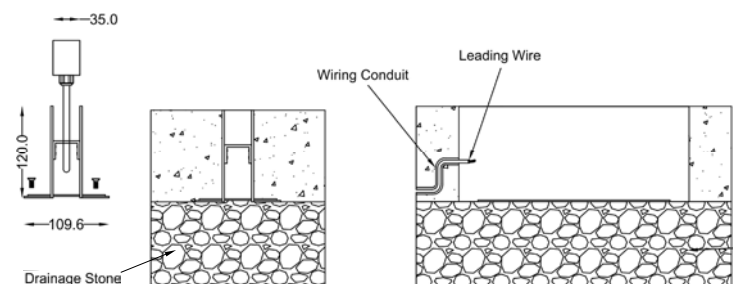



AURALED

Add LED features to your
garden and landscapes


AL-RMINIC

Rocky Mini In-Ground

Features:

- Colour Temperature 3000K, 4000K
- 316L Stainless Steel

Ordering Information			
Code	Power	Kelvin	Size
AL-RMINIC-3K	0.4W	3000K	20mm x 27mm
AL-RMINIC-4K	0.4W	4000K	20mm x 27mm

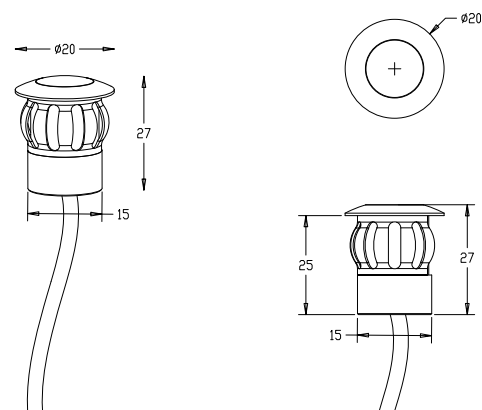

Specification	
Voltage	12VDC / 24VDC
Power	0.44 W
Lumens	40lm
Beam Angle	110°
Kelvin	3000K, 4000K
IP Rating	IP68
IK Rating	IK03


AL-RMINI-RGB

Rocky Mini RGB In-Ground

Features:

- Colour Temperature RGB 3 in 1
- 316L Stainless Steel

Ordering Information			
Code	Power	Kelvin	Size
AL-RMINIC-RGB	0.4W	RGB 3 in 1	20mm x 27mm

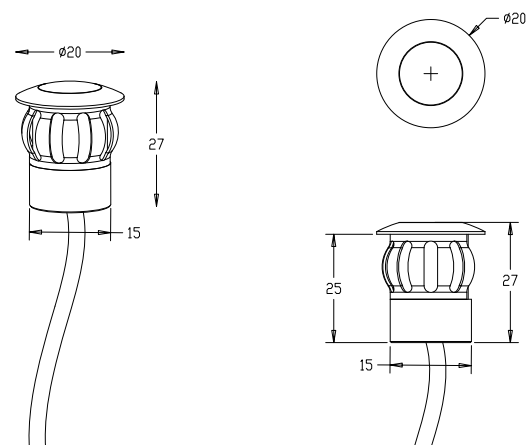


Specification	
Voltage	12VDC / 24VDC
Power	0.44 W
Lumens	8lm
Beam Angle	110°
Kelvin	RGB 3 in 1
IP Rating	IP68
IK Rating	IK03

AL-RMC Rocky MC In-Ground

Features:

- Colour Temperature 3000K, 4000K
- 316 Stainless Steel

Ordering Information			
Code	Power	Kelvin	Size
AL-RMC-3K	3.4W	3000K	58mm x 76mm
AL-RMC-4K	3.4W	4000K	58mm x 76mm

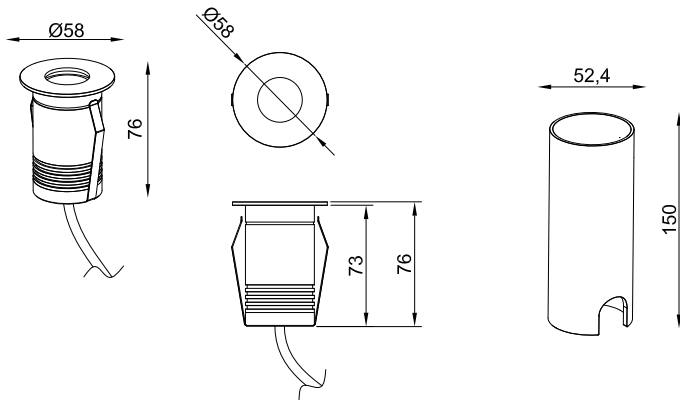


Specification	
Voltage	220-240V AC
Power	3.4W
Lumens	190lm
Beam Angle	7°/11°/20°/33°/43°
Kelvin	3000K, 4000K
IP Rating	IP67
IK Rating	IK08

AL-RMC-RGBW Rocky MC RGBW In-Ground

Features:

- Colour Temperature RGBW 3000K 4in1
- 316 Stainless Steel

Ordering Information			
Code	Power	Kelvin	Size
AL-RMC- RGBW	3.4W	3000K	58mm x 76mm

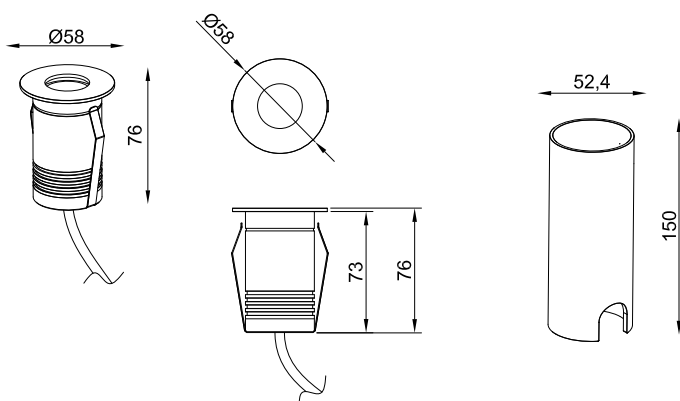

Specification	
Voltage	24VDC
Power	3.4 W
Lumens	190lm
Beam Angle	30°
Kelvin	3000k
IP Rating	IP67
IK Rating	IK08


AL-RLHC

Rocky LHC In-Ground

Features:

- Colour Temperature 3000K
- 316L Stainless Steel

Ordering Information			
Code	Power	Kelvin	Size
AL-RLHC-3000K	10.5W	3000K	115mm x 100mm

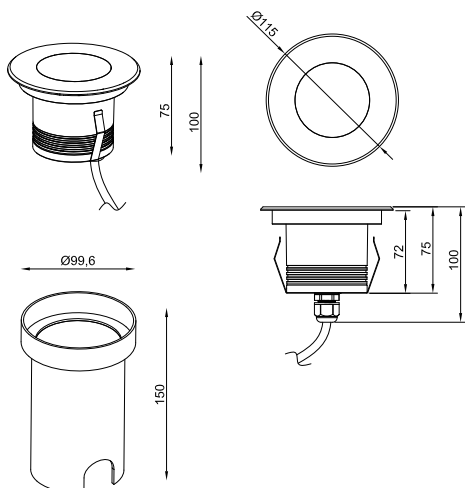

Specification	
Voltage	220-240AC
Power	10.5W
Lumens	650lm
Beam Angle	20°/30°/40°/60°
Kelvin	3000K
IP Rating	IP67
IK Rating	IK09


AL-RLC-RGBW

Rocky LC RGBW In-Ground

Features:

- Colour Temperature 3000K
- 316 Stainless Steel

Ordering Information			
Code	Power	Kelvin	Size
AL-RLC- RGBW	7W	3000K	115mm x 100mm

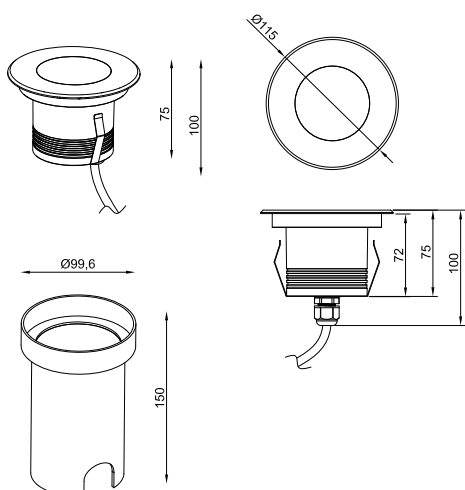

Specification	
Voltage	24V DC
Power	7W
Lumens	300lm
Beam Angle	40°
Kelvin	RGBW 3000K 4in1
IP Rating	IP67
IK Rating	IK09


AL-RXC

Rocky XC In-Ground

Features:

- Colour Temperature 3000K
- 316L Stainless Steel

Ordering Information			
Code	Power	Kelvin	Size
AL-RXC-3000K	21.6W	3000K	175mm x 120mm

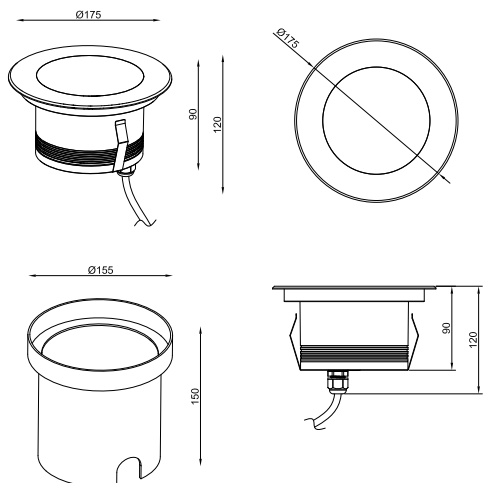

Specification	
Voltage	220-240V AC
Power	21.6W
Lumens	1445lm
Beam Angle	7°/11°/20°/35°/43°
Kelvin	3000K
IP Rating	IP67
IK Rating	IK10


AL-RXC-RGBW

Rocky XC RGBW In-Ground

Features:

- Colour Temperature RGBW 3000K 4in1
- 316L Stainless Steel

Ordering Information			
Code	Power	Kelvin	Size
AL-RXC-RGBW	7W	3000K	175mm x 120mm

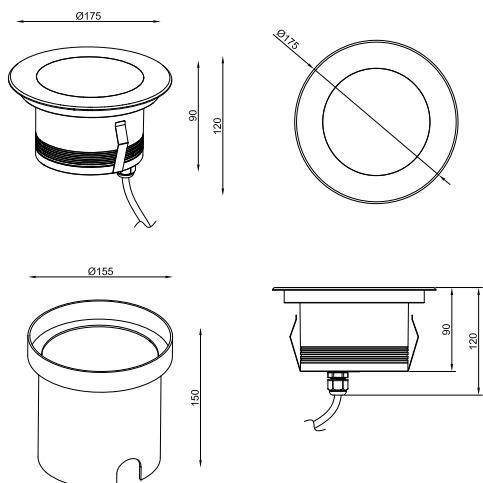


Specification	
Voltage	24V DC
Power	22W
Lumens	980lm
Beam Angle	30°
Kelvin	RGBW 3000K 4in1
IP Rating	IP67
IK Rating	IK10

AL-ANTIGLARE-MA


Antiglare Honeycomb Louvre

Features:

- Aluminium

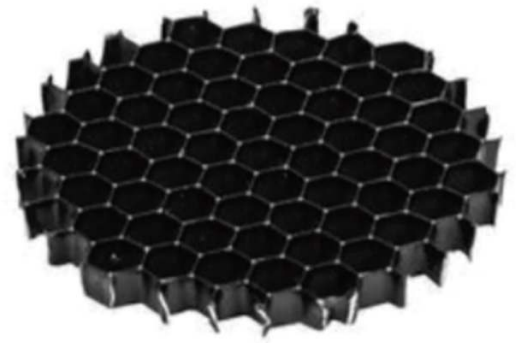

Ordering Information	
Code	Size
AL-ANTIGLARE-MA	26mm

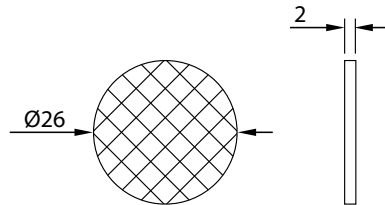


AL-ANTIGLARE-LA


Antiglare Honeycomb Louvre

Features:

- Aluminium

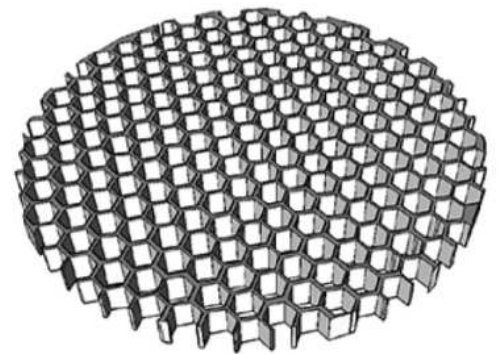

Ordering Information	
Code	Size
AL-ANTIGLARE-LA	44.5mm

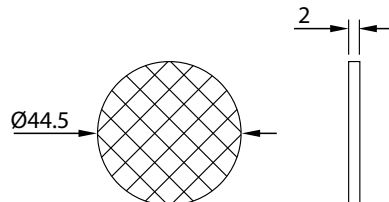


AL-ANTIGLARE-XA


Antiglare Honeycomb Louvre

Features:

- Aluminium

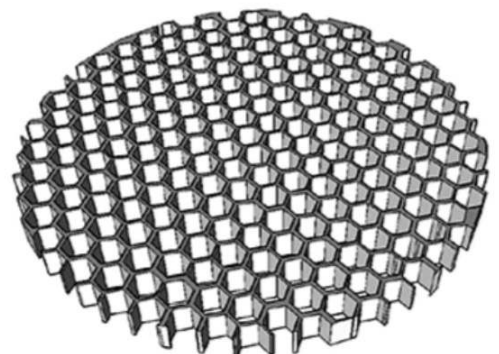

Ordering Information	
Code	Size
AL-ANTIGLARE-XA	105mm

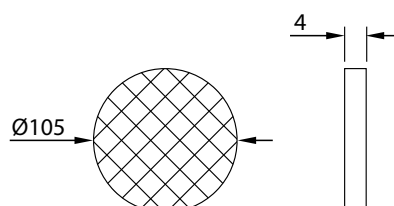

AL-POOL

Swimming Pool Lighting

AL-POOL IP68 rated flexible LED neon gives you unprecedented freedom in lighting design for indoor and outdoor underwater applications, featuring continuous glow, multiple colour options, custom length, and two bending directions. As a professional underwater luminaire, it is UL 676 certified and resistant to rust, bromine, salt, ozone, chlorine, UV proven by extensive tests.

Features:

- UL 676 Safety Approved
- 5m Depth
- 30m Single Length
- Warranty 5yrs





AL-SAUNA **Sauna & Spa Lighting**

Suitable for high temperature and humidity environments such as Dry Sauna, Wet Sauna, Steam Room, SPA, etc.

Features:

- Ambient Working Temperature Max 95°
- Ambient Relative Humidity Max 100%
- Lumen Output Max 450 lm/m
- Warranty 3yrs



The Home of LED Installation Solutions

Today's high quality, technically advanced LED fittings are only ever as good as their installation. That's why we launched **AuraTEC** our LED Strip and Neon Installation specialist service.

When it comes to the installation of our range of LED Strip and Neon products there is a lot to consider if you are looking to fully exploit the products features and benefits. Whether it's a straightforward strip install or a programmable DMX lightshow our technicians can guarantee the perfect end result.

AuraTEC can make sure you get the best out of your install with our years of technical knowledge and product development experience. Our fully kitted out mobile vans can come to site and work along side your other contractors to guarantee the best possible finish.

We are often called to site to rectify poor installs where the product has been fitted without the proper care and attention, leading to poor performance or even product failure.

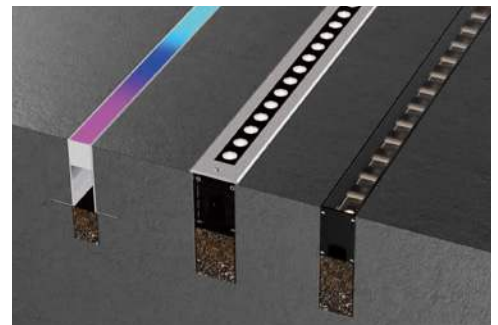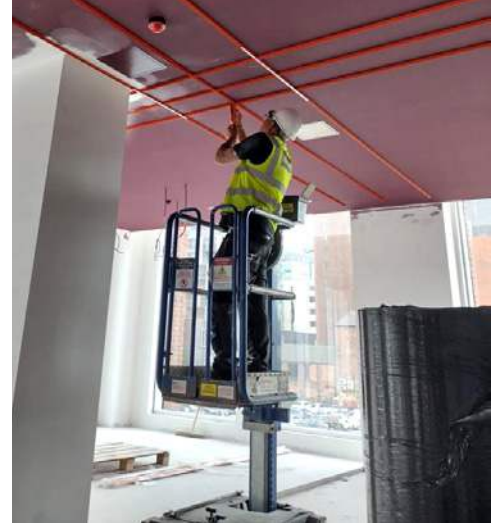





AURALED

0161 494 2118

www.auraled.co.uk

**THE HOME OF
LED LIGHTING
SOLUTIONS**