



High quality square wall light with both down only and up and down lighting options for versatility, and available in two sizes to cover a variety of applications.

- Die-cast aluminium base with extruded aluminium body.
- Super white tempered frosted glass lens offering high visual comfort.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- High quality LED chips and driver.
- Up and down and down only lighting options.
- RAL9005, other RAL colours available on request.



Optics

TP25



Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
ASS-S10	TP25	4	3000	990	>70	10W	IP65	IK08	1.5
ASS-S20	TP25	8	3000	2300	>70	20W	IP65	IK08	1.7
ASS-M23	TP25	9	3000	2350	>70	23W	IP65	IK08	2.7
ASS-M36	TP25	18	3000	4100	>70	36W	IP65	IK08	3.3


General Specification

Input voltage	100-240V
Input frequency	50/60Hz
Surge protection	0.5KV
LED Chips	CREE XTE
Lifetime	L70 >65,000hours L80 >65,000 hours L90 >65,000 hours
SDCM	SDCM<6
Class	Class I
Ambient temperature	-20°C to +50°C
Material	High pressure die-cast aluminium housing with tempered glass
Finish	Polyester powder coat cured under heat
RAL colour	RAL9005


Driver Details

Product	ASS-S10	ASS-S20	ASS-M23	ASS-M36
Driver	Ealgerise			
Dimming control	Non Dimmable			
Driver current	700mA	700mA	700mA	600mA
Inrush current	30A MAX	20A MAX	20A MAX	20A MAX
Power factor	>0.9	>0.9	>0.9	>0.9

Dimensions



ASS-S

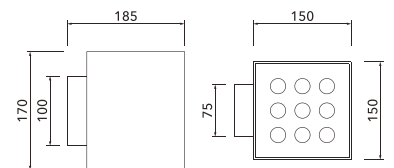

ASS-M