




A modern and stylish projector style floodlight ideal for a range of applications and available in two sizes with an RGBW option ensure versatility of the range.

- Die-cast aluminium construction with tempered glass diffuser and two size options.
- Optical lenses offer visual comfort and uniform light distribution.
- High quality LED chips and driver with RGBW options in each size.
- Suitable for a variety of installation methods to meet the requirements of the application.
- Spill ring and honeycomb louvres available as accessories.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- All external screws are 304 stainless steel.
- RAL9007, other RAL colours available on request.



Optics

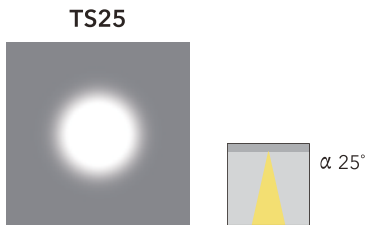

Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
DIV-S25	TS25	12	4000	2050	>80	25W	IP66	IK09	3.4
DIV-S40	TS25	12	4000	3120	>80	40W	IP66	IK09	3.4
DIV-S50-RGBW	TS25	12	RGBW	2000	>80	50W	IP66	IK09	3.6
DIV-M50	TS25	24	4000	4300	>80	50W	IP66	IK09	5.5
DIV-M75	TS25	24	4000	6170	>80	75W	IP66	IK09	5.5
DIV-M75-RGBW	TS25	24	RGBW	2000	>80	75W	IP66	IK09	5.7

General Specification


Input voltage	220-240V
Input frequency	50/60Hz
Surge protection	6KV
LED Chips	Samsung LH351C,RGBW-3535
Lifetime	L70 >60,000hours L80 >60,000 hours L90 >60,000 hours
SDCM	SDCM<6
Class	Class I
Ambient temperature	-20°C to +50°C
Material	High pressure die-cast aluminium housing with tempered glass
Finish	Polyester powder coat cured under heat
RAL colour	RAL9007

Driver Details


Product	DIV-S25	DIV-S40	DIV-S50-RGBW
Driver	Tridonic		Inventronics
Dimming control	DALI		DMX
Driver current	630mA	1000mA	0-1300mA
Inrush current	14.88A, 226µs	24.88A, 236µs	11.8A, 112µs
Power factor	0.97	0.97	0.96

Product	DIV-M50	DIV-M75	DIV-M75-RGBW
Driver	Tridonic		Inventronics
Dimming control	DALI		DMX
Driver current	650mA	960mA	0-1600mA
Inrush current	32A, 355µs	41.6A, 238µs	11A, 36µs
Power factor	0.97	0.98	0.96

Dimensions



DIV-S



DIV-M