



A linear wall wash light available in two lengths and in fixed colour and RGBW options. Ideal for illuminating building facades and other structures such as bridges.

- Extruded aluminium body with die-cast aluminium end caps and silicon gaskets for high IP rating.
- Super white tempered glass, with high visual comfort and uniform light distribution.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- Wall and ceiling mounting with adjustable mounting brackets.
- High quality LED chips and driver. Fixed colour and RGBW available with DMX control.
- Each luminaire is supplied with quick-connect couplers for easy installation.
- All external screws are 304 stainless steel.
- RAL9007, other RAL colours available on request.



Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
DUB-S12	10°40°	6	4000	600	>70	12W	IP67	IK08	1.5
DUB-S12-RGBW	10°40°	6	RGBW	300	>70	12W	IP67	IK08	1.6
DUB-M36	10°40°	18	4000	2160	>70	36W	IP67	IK08	3.3
DUB-M36-RGBW	10°40°	18	RGBW	800	>70	36W	IP67	IK08	3.4
DUB-L60	10°40°	28	4000	5100	>70	60W	IP67	IK08	4.8
DUB-L60-RGBW	10°40°	28	RGBW	3200	>70	60W	IP67	IK08	4.9

General Specification



Input voltage	220-240V
Input frequency	50/60Hz
Surge protection	0.5KV
LED Chips	NICHINA 3535 /RGBW-3535
Lifetime	L70 >60,000hours L80 >60,000 hours L90 >60,000 hours
SDCM	SDCM<6
Class	Class I
Ambient temperature	-20°C to +50°C
Material	High pressure die-cast aluminium housing with tempered glass
Finish	Polyester powder coat cured under heat
RAL colour	RAL9007

Driver Details

Product	DUB-S12	DUB-S12-RGBW	DUB-M36	DUB-M36-RGBW
Driver	Kegu	MEAN WELL	Eaglerise	MEAN WELL
Dimming control	/			
Driver current	600mA	0-500mA	600mA	0-1340mA
Inrush current	≤13A, 350µs	70A, 185µs	20A MAX	50A, 210µs
Power factor	0.9	0.9	>0.9	0.95

Product	DUB-L60	DUB-L60-RGBW
Driver	Eaglerise	Inventronics
Dimming control	/	
Driver current	600mA	0-2500mA
Inrush current	20A MAX	138A, 1.60µs
Power factor	>0.9	0.96

Dimensions

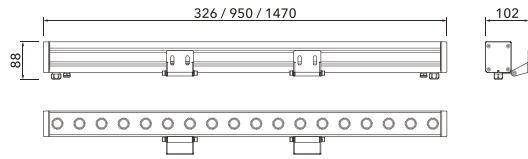

DUB