




A high output and inground linear wall wash light available in three lengths and in fixed colour and RGBW options offering versatility for a range of applications.

- Extruded aluminium body with die-cast aluminium end caps and silicon gaskets for high IP rating.
- 304 grade stainless steel cover plate and in ground sleeve. Luminaire can withstand weight of 5000kg.
- Super white tempered glass, with high visual comfort and uniform light distribution.
- High quality LED chips, and DC 24V input for fixed output and DMX control options.
- Specially designed optics ideal for wall washing applications.
- All external screws are 304 stainless steel.

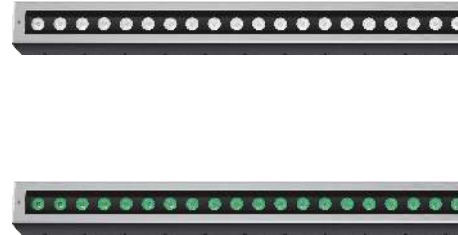



Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
IBE-16-L30	TE13	6	4000	1360	>80	16W	IP66	IK09	2.0
IBE-20-L30-RGBW	TE13	6	4000	1450	>80	20W	IP66	IK09	2.2
IBE-32-L50	TE13	12	4000	2720	>80	32W	IP66	IK09	3.2
IBE-40-L50-RGBW	TE13	12	4000	2930	>80	40W	IP66	IK09	3.4
IBE-65-L100	TE13	24	4000	5520	>80	65W	IP66	IK09	6.3
IBE-80-L100-RGBW	TE13	24	4000	5850	>80	80W	IP66	IK09	6.6

General Specification

Input voltage	24VDC
Input frequency	/
Surge protection	/
LED Chips	OSRAM 3535 / RGBW-3535
Lifetime	L70 >60,000hours L80 >60,000 hours L90 >60,000 hours
SDCM	SDCM<6
Class	Class III
Ambient temperature	-20°C to +50°C
Material	304 grade stainless steel housing with tempered glass
Finish	/
RAL colour	Stainless steel

Dimensions



IBE