




A classic spherical luminaire with two outputs, ideal for pedestrian areas, parks and walkways.

- Galvanised steel housing with high quality tempered glass and chrome reflector.
- Optical lenses offering visual comfort and uniform light distribution.
- High quality LED chips and DALI driver as standard, with in-built surge protection up to 20KV.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- Suitable for use with a range of controls and remote management systems.
- All external screws are 304 stainless steel as standard.
- RAL9005, other RAL colours available on request.



## Optics

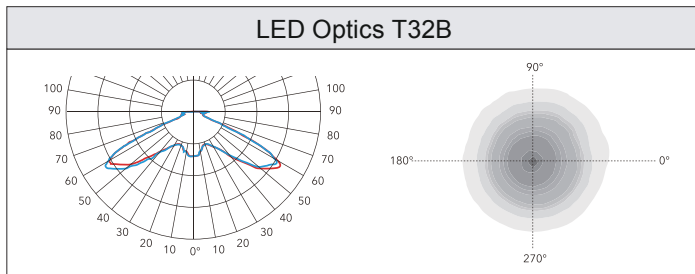

## Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
MON-40	T32B	128	4000	5640	>70	40W	IP65	IK09	9.4
MON-60	T32B	128	4000	8410	>70	60W	IP65	IK09	9.4


**General Specification**

Input voltage	220-240V
Input frequency	50/60Hz
Surge protection	20KV
LED Chips	OSRAM 2835
Lifetime	L70 >36,000hours   L80 >36,000 hours   L90 30,000 hours
SDCM	SDCM<6
Class	Class I
Ambient temperature	-20°C to +50°C
Material	High pressure die-cast aluminium housing with PC cover
Finish	Polyester powder coat cured under heat
RAL colour	RAL9005

**Driver Details**

Product	MON-40	MON-60
Driver	Tridonic	
Dimming control	DALI	
Driver current	1050mA	790mA
Inrush current	24.88A, 236µs	32A, 355µs
Power factor	0.97	0.97

**Dimensions**



**MON**