




A stylish and modern column luminaire available with a clear diffuser or with integrated louvre for low glare. Two heights are available in each style.

- Extruded aluminium pole with die-cast lamp head and polycarbonate diffuser.
- Two versions available with different light distribution: top light source with clear diffuser and central light source with anti-glare louvre.
- High quality LED chips and driver.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- Suitable for use with a range of controls and remote management systems.
- All external screws are 304 stainless steel as standard.
- RAL9007, other RAL colours available on request.
- Other sizes available on request.



Optics

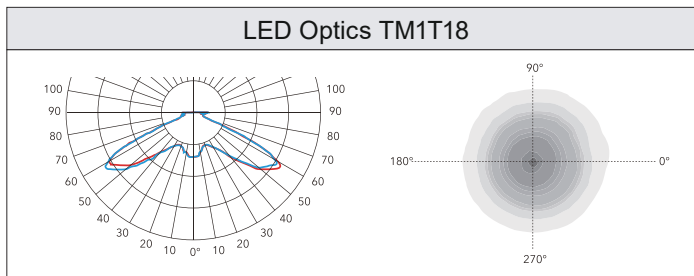

Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
POL-C270-50	TM1T18	18	4000	6870	>70	50W	IP66	IK09	27
POL-C350-50	TM1T18	18	4000	6870	>70	50W	IP66	IK09	31.1


General Specification

Input voltage	100-305V
Input frequency	50/60Hz
Surge protection	20KV
LED Chips	Philips 5050
Lifetime	L70 100,000hours L80 70,000 hours L90 34,000 hours
SDCM	SDCM<6
Class	Class I
Ambient temperature	-20°C to +50°C
Material	High pressure die-cast aluminium housing with polycarbonate diffuser
Finish	Polyester powder coat cured under heat
RAL colour	RAL9007

Driver Details

Product	POL-C270-50	POL-C350-50
Driver	MEANWELL XLG	
Dimming control	/	
Driver current	1300mA	1300mA
Inrush current	50A, 350µs	50A, 350µs
Power factor	0.95	0.95

Dimensions



POL-C