



A linear wall wash light available in two lengths and in fixed colour and RGBW options. Ideal for illuminating building facades and other structures such as bridges.

- Extruded aluminium body with die-cast aluminium end caps and silicon gaskets for high IP rating.
- Super white tempered glass, with high visual comfort and uniform light distribution.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- Wall and ceiling mounting with adjustable mounting brackets.
- High quality LED chips and driver. Fixed colour and RGBW available with DMX control.
- Each luminaire is supplied with quick-connect couplers for easy installation.
- All external screws are 304 stainless steel.
- RAL9007, other RAL colours available on request.



Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
PRA-7-RGBW-A	15°50°	8	RGBW	RGBW	>70	7W	IP67	IK08	0.6
PRA-12	15°50°	12	3000/4000	910/1000	>70	12W	IP67	IK08	1.2
PRA-12-RGBW	15°50°	12	RGBW	RGBW	>70	12W	IP67	IK08	1.3
PRA-18	15°50°	18	3000/4000	920/1030	>70	18W	IP67	IK08	1.5
PRA-18-RGBW	15°50°	18	RGBW	RGBW	>70	18W	IP67	IK08	1.6

General Specification



Input voltage	24VDC
Input frequency	/
Surge protection	/
LED Chips	LUMILEDS 3030 /RGBW-3535
Lifetime	L70 >64,000hours L80 >64,000 hours L90 54,000 hours
SDCM	SDCM<6
Class	Class III
Ambient temperature	-20°C to +50°C
Material	High pressure die-cast aluminium housing with tempered glass
Finish	Polyester powder coat cured under heat
RAL colour	RAL9007

Driver Details

Product	PRA-7-RGBW-A	PRA-12	PRA-12-RGBW
Driver	24VDC INPUT		
Dimming control	DMX	/	DMX
Driver current	/		
Inrush current	/		
Power factor	/		

Product	PRA-18	PRA-18-RGBW
Driver	24VDC INPUT	
Dimming control	/	DMX
Driver current	/	
Inrush current	/	
Power factor	/	

Dimensions

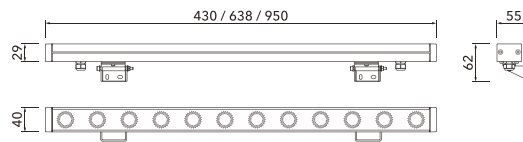

PRA