






A modern and minimalistic style luminaire available with four outputs, ideal for walkways and pedestrian areas. A round pole fixing bracket and wall mounting bracket are also available.

- Die-cast aluminium housing with polycarbonate diffuser and chrome reflector.
- Optical lens offering visual comfort and uniform light distribution with different distribution options.
- High quality LED chips and driver.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- Suitable for use with a range of controls and remote management systems.
- All external screws are 304 stainless steel as standard.
- RAL9005, other RAL colours available on request.



## Optics

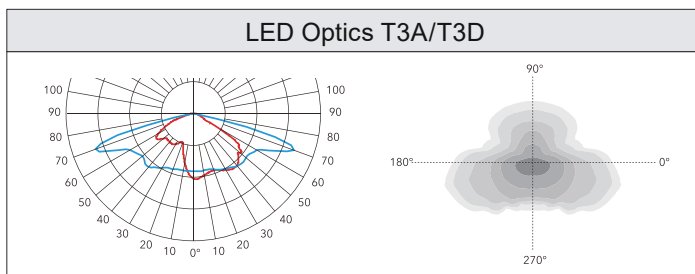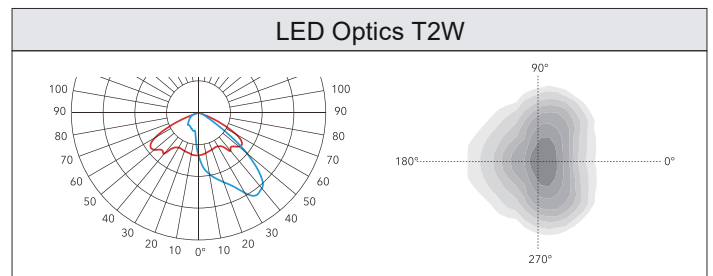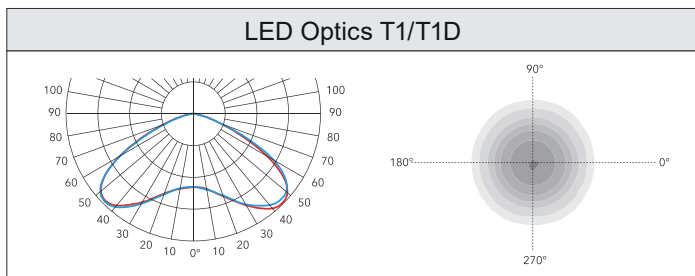

**Product Specification**

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
URC-S60	T1	32	3000/4000	8790/9410	>70	60W	IP66	IK08	6.3
URC-S60	T2W			8700/9300					
URC-S60	T3A			8400/9000					
URC-M80	T1	32	3000/4000	11400/12190	>70	80W	IP66	IK08	7.5
URC-M80	T3A			10760/11540					
URC-M100	T1	32	3000/4000	13460/14450	>70	100W	IP66	IK08	7.5
URC-M100	T3A			13050/14010					
URC-M120	T1	32	3000/4000	15790/16790	>70	120W	IP66	IK08	7.5
URC-M120	T3A			15060/16060					


**General Specification**

<b>Input voltage</b>	220-240V
<b>Input frequency</b>	50/60Hz
<b>Surge protection</b>	20KV
<b>LED Chips</b>	Philips 5050
<b>Lifetime</b>	L70 100,000hours   L80 70,000 hours   L90 34,000 hours
<b>SDCM</b>	SDCM<6
<b>Class</b>	Class I
<b>Ambient temperature</b>	-20°C to +50°C
<b>Material</b>	High pressure die-cast aluminium housing with tempered glass
<b>Finish</b>	Polyester powder coat cured under heat
<b>RAL colour</b>	RAL9005

**Driver Details**

Product	URC-S60	URC-M80	URC-M100	URC-M120
Driver	PHILIPS LP			
Dimming control	1-10V			
Driver current	580mA	790mA	970mA	570mA
Inrush current	35A, 210µs	48A, 278µs	48A, 278µs	45A, 315µs
Power factor	0.95	0.95	0.95	0.95

**Dimensions**

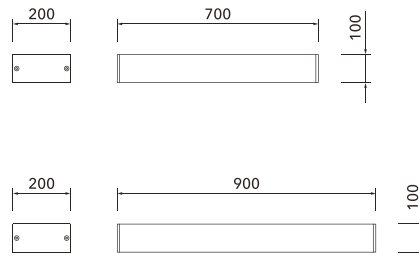

**URC**