


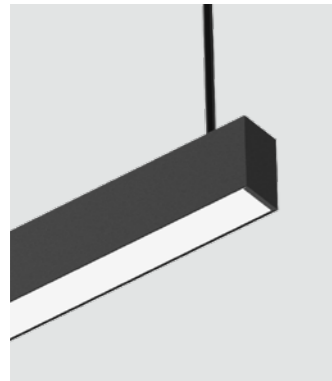



AL-AH35FD
Diffuser





AL-BH35FD

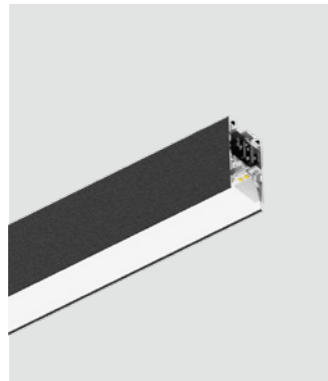



AL-CH35FD





AL-DH35FD

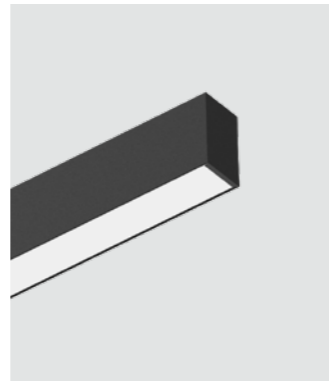


AL-AH35FP
Prismatic

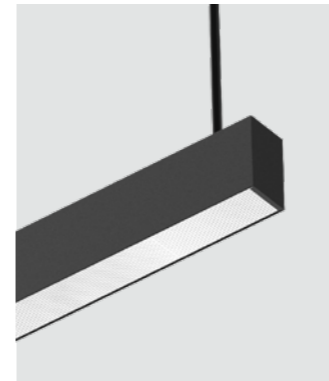



AL-BH35FP

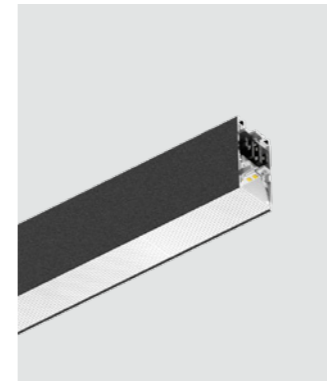

AL-CH35FP



AL-DH35FP

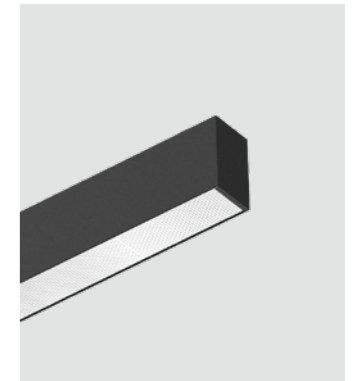

Dimming Method



Basic Parameters

Installation	Pendant
Lighting direction	Upward&Downward
Material	AL6063-T5
Coating	Spraying surface
Colors	Matt black / Matt white
Input voltage	AC220-240V
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	CE / UKCA / Rohs / Reach

Luminaire Parameters

Light source	2835
SDCM	≤3 Step(ANSI)
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500 / 3CCT Dial Switch ^①
Length (mm)	1200 / 1800 / 2400
Power(W)	45 / 67 / 90
Luminous flux (lm) Up (Normal)	1732 / 2579 / 3465
Luminous flux (lm) Down (Normal)	3218 / 4791 / 6435
Light efficiency(LM/W) (Normal)	110
Luminous flux (lm) Up (High-efficiency)	2106 / 3136 / 4212
Luminous flux (lm) Down (High-efficiency)	3744 / 5574 / 7488
Light efficiency(LM/W) (High-efficiency)	130
Luminous flux (lm) Up (Normal-3CCT)	1530 / 2278 / 3060
Luminous flux (lm) Down (Normal-3CCT)	2970 / 4422 / 5940

Luminous flux (lm) (High-efficiency-3CCT) 3480 / 5400 / 6960

Light efficiency(LM/W) (High-efficiency-3CCT) 120


Beam angle 100°

* The above parameters are based on Ra80, 4000K white luminaires.
① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


Installation Accessories

Pendant cable	PN(E)-D
Flexible diffuser	CV-AS35FD


Optical Parameter - Normal




Optical Parameter - High efficiency



Normal-3CCT Dial Switch



High efficiency-3CCT Dial Switch



Dimming Method



Basic Parameters

Installation	Pendant
Lighting direction	Upward&Downward
Material	AL6063-T5
Coating	Spraying surface
Colors	Matt black / Matt white
Input voltage	AC220-240V
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	CE / UKCA / Rohs / Reach

Luminaire Parameters

Light source	2835
SDCM	≤3 Step(ANSI)
UGR	<19 (X=4H, Y=8H)
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500 / 3CCT Dial Switch ^①
Length (mm)	1200 / 1800
Power(W)	45 / 67
Luminous flux (lm) Up (Normal)	1748 / 2603
Luminous flux (lm) Down (Normal)	2977 / 4432
Light efficiency(LM/W) (Normal)	105
Luminous flux (lm) Up (High-efficiency)	1998 / 2975
Luminous flux (lm) Down (High-efficiency)	3402 / 5065
Light efficiency(LM/W) (High-efficiency)	120
Luminous flux (lm) Up (Normal-3CCT)	1582 / 2355
Luminous flux (lm) Down (Normal-3CCT)	2693 / 4010

Luminous flux (lm) (High-efficiency-3CCT) 3045 / 4725

Light efficiency(LM/W) (High-efficiency-3CCT) 105


Beam angle 70°

* The above parameters are based on Ra80, 4000K white luminaires.
① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


Installation Accessories

Pendant cable	PN(E)-D
---------------	---------


Optical Parameter - Normal



Optical Parameter - High efficiency



Normal-3CCT Dial Switch



High efficiency-3CCT Dial Switch

