





AL-AH70FD
Diffuser

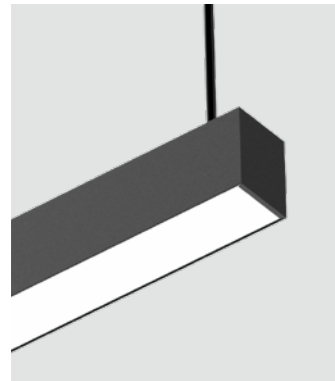



AL-BH70FD





AL-CH70FD




AL-DH70FD

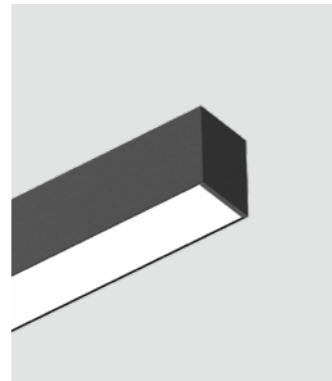


AL-AH70FP
Prismatic

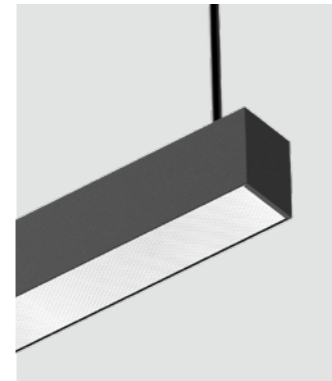



AL-BH70FP



AL-CH70FP



AL-DH70FP

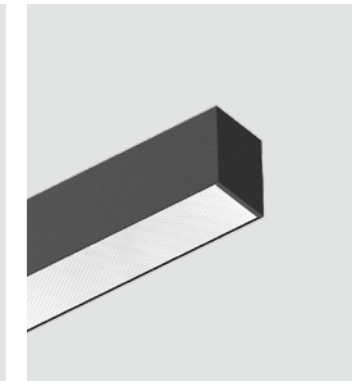

Dimming Method



Basic Parameters

Installation	Pendant
Lighting direction	Upward&Downward
Material	AL6063-T5
Coating	Spraying surface
Colors	Matt black / Matt white
Input voltage	AC220-240V
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	CE / UKCA / Rohs / Reach

Luminaire Parameters

Light source	2835
SDCM	≤3 Step(ANSI)
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500 / 3CCT Dial Switch ^①
Length (mm)	1200 / 1800 / 2400
Power(W)	70 / 106 / 140
Luminous flux (lm) Up (Normal)	2772 / 4198 / 5544
Luminous flux (lm) Down(Normal)	4928 / 7462 / 9856
Light efficiency(LM / W) (Normal)	110
Luminous flux (lm) Up (High-efficiency)	3213 / 4865 / 6426
Luminous flux (lm) Down (High-efficiency)	6237 / 9445 / 12474
Light efficiency(LM / W) (High-efficiency)	135
Luminous flux (lm) Up (Normal-3CCT)	2737 / 4145 / 5474
Luminous flux (lm) Down (Normal-3CCT)	5313 / 8045 / 10626


Luminous flux (lm) (High-efficiency-3CCT)	6580 / 9800 / 12600
Light efficiency(LM / W) (High-efficiency-3CCT)	140
Beam angle	100°

* The above parameters are based on Ra80, 4000K white luminaires.
① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


Installation Accessories

Pendant cable	PN(E)-D
Flexible diffuser	CV-AS70FD


Optical Parameter - Normal




Optical Parameter - High efficiency



Normal-3CCT Dial Switch



High efficiency-3CCT Dial Switch



Dimming Method



Basic Parameters

Installation	Pendant
Lighting direction	Upward&Downward
Material	AL6063-T5
Coating	Spraying surface
Colors	Matt black / Matt white
Input voltage	AC220-240V
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	CE / UKCA / Rohs / Reach

Luminaire Parameters

Light source	2835
SDCM	≤3 Step(ANSI)
UGR	<19 (X=4H,Y=8H)
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500 / 3CCT Dial Switch ^①
Length (mm)	1200 / 1800
Power(W)	70 / 106
Luminous flux (lm) Up (Normal)	2720 / 4118
Luminous flux (lm) Down (Normal)	4630 / 7012
Light efficiency(LM / W) (Normal)	105
Luminous flux (lm) Up (High-efficiency)	3276 / 4961
Luminous flux (lm) Down(High-efficiency)	5824 / 8819
Light efficiency(LM / W) (High-efficiency)	130
Luminous flux (lm) Up (Normal-3CCT)	2772 / 4198
Luminous flux (lm) Down (Normal-3CCT)	4928 / 7462


Luminous flux (lm) (High-efficiency-3CCT)	6345 / 9450
Light efficiency(LM / W) (High-efficiency-3CCT)	135
Beam angle	70°

* The above parameters are based on Ra80, 4000K white luminaires.
① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


Installation Accessories

Pendant cable	PN(E)-D
---------------	---------


Optical Parameter - Normal



Optical Parameter - High efficiency



Normal-3CCT Dial Switch



High efficiency-3CCT Dial Switch

