


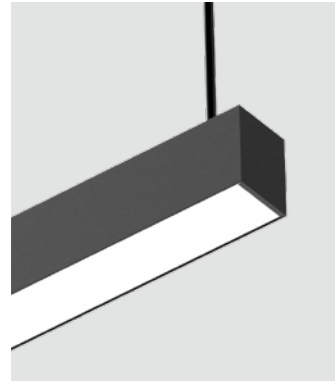



AL-AS50FD
Diffuser





AL-BS50FD

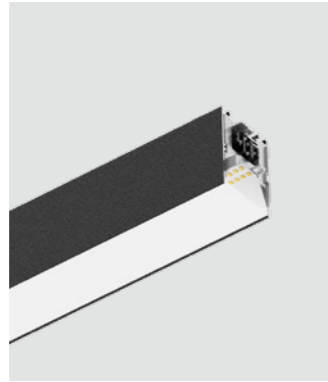



AL-CS50FD




AL-DS50FD

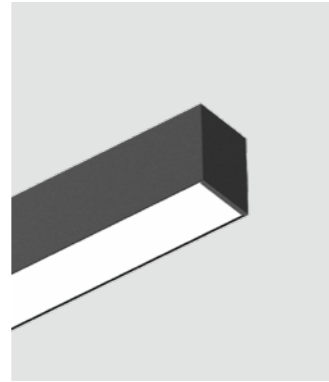


AL-AS50FP
Prismatic

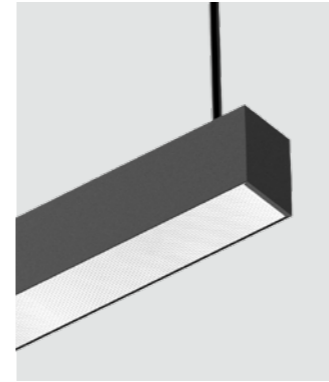



AL-BS50FP



AL-CS50FP



AL-DS50FP

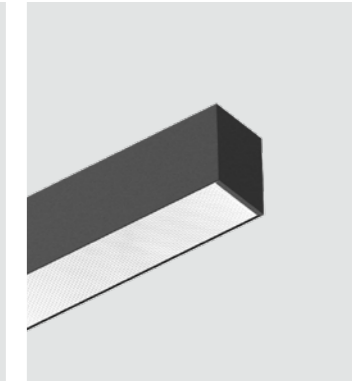

Dimming Method



Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Downward
Material	AL6063-T5
Coating	Spraying surface
Colors	Matt black / Matt white
Input voltage	AC220-240V
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	CE / UKCA / Rohs / Reach

Luminaire Parameters

Light source	2835
SDCM	≤3 Step(ANSI)
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500 / 3CCT Dial Switch ^①
Length (mm)	1200 / 1800 / 2400
Power(W)	38 / 58 / 76
Luminous flux (lm) (Normal)	4180 / 6380 / 8360
Light efficiency(LM/W) (Normal)	110
Luminous flux (lm) (High-efficiency)	4940 / 7540 / 9880
Light efficiency(LM/W) (High-efficiency)	130
Luminous flux (lm) (Normal-3CCT)	4180 / 6380 / 8360
Light efficiency(LM/W) (Normal-3CCT)	110


Luminous flux (lm) (High-efficiency-3CCT)	4940 / 7540 / 9880
Light efficiency(LM/W) (High-efficiency-3CCT)	130
Beam angle	100°

* The above parameters are based on Ra80, 4000K white luminaires.
① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


Installation Accessories

Pendant cable	PN(E)-D
Flexible diffuser	CV-AS35FD


Optical Parameter - Normal




Optical Parameter - High efficiency



Normal-3CCT Dial Switch



High efficiency-3CCT Dial Switch



Dimming Method



Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Downward
Material	AL6063-T5
Coating	Spraying surface
Colors	Matt black / Matt white
Input voltage	AC220-240V
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	CE / UKCA / Rohs / Reach

Luminaire Parameters

Light source	2835
SDCM	≤3 Step(ANSI)
UGR	<19 (X=4H,Y=8H)
CRI	80 / 90
CCT	2700 / 3000 / 4000 / 6500 / 3CCT Dial Switch ^①
Length (mm)	1200 / 1800
Power(W)	38 / 58
Luminous flux (lm) (Normal)	3990 / 6090
Light efficiency(LM/W) (Normal)	105
Luminous flux (lm) (High-efficiency)	4560 / 6960
Light efficiency(LM/W) (High-efficiency)	120
Luminous flux (lm) (Normal-3CCT)	3610 / 5510
Light efficiency(LM/W) (Normal-3CCT)	95


Luminous flux (lm) (High-efficiency-3CCT)	4370 / 6670
Light efficiency(LM/W) (High-efficiency-3CCT)	115
Beam angle	70°

* The above parameters are based on Ra80, 4000K white luminaires.
① The color temperature range of the 3CCT dial switch is 3000K / 4200K / 6500K


Installation Accessories

Pendant cable	PN(E)-D
---------------	---------


Optical Parameter - Normal



Optical Parameter - High efficiency



Optical Parameter - White Light-3CCT



High efficiency-3CCT Dial Switch

